FHU HUSE Sebastian Hulbój Bielsko-Biała 43-300 ul. Młyńska 5 tel. +48 600 269 537 NIP: 937 217 63 61

www.huse.com.pl biuro@huse.com.pl s.hulboj@huse.com.pl



name:BENCH WITHSKU:SW008description:Device that allows street

BENCH WITH HANDRAILS

Device that allows stretching, strength, pull-ups, push-ups, sit-ups.



safety rules:

- Certified device
- · WSU:
- Maximum load 160 kg
- Minimal increase 140 cm

dimentions (length x width)

245 x 300 x 160 cm

safety zone:

545 x 600 cm

technical specifications:

- Galvanized steel pipes min. 3 mm of thickness
- Pipe diameters: 33 and 48 mm
- Powder coated twice
- Ladders and tubes are attached to the poles with M12 bolts, self-made bolt nuts
- Mounting orifice 200 x 200 x 8 mm, bolt M12
- Profiles 100x100 mm or 80x80 mm

www.huse.com.pl

Produced based on the standards BS EN16630: 2015 FHU HUSE Sebastian Hulbój Bielsko-Biała 43-300 ul. Młyńska 5 tel. +48 600 269 537 NIP: 937 217 63 61


www.huse.com.pl biuro@huse.com.pl s.hulboj@huse.com.pl



1

3


view from the top:

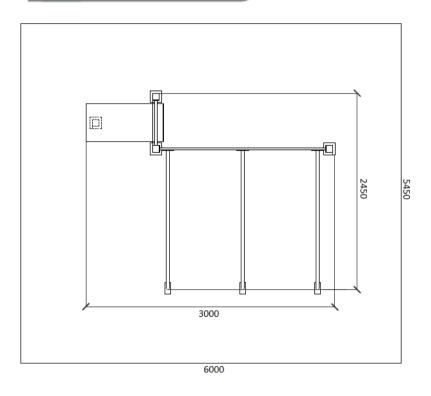

items:

- bench with a ladder
- high handrail ø 48,3 mm

cross-section:

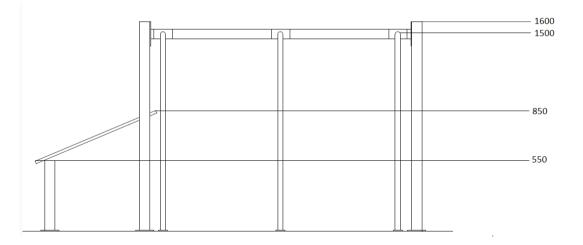

www.huse.com.pl

FHU HUSE Sebastian Hulbój Bielsko-Biała 43-300 ul. Młyńska 5 tel. +48 600 269 537 NIP: 937 217 63 61

www.huse.com.pl biuro@huse.com.pl s.hulboj@huse.com.pl



300

min 400 max 800

foundation: 1600 1500 850 550 8 800 50 R C20/25 Ш 15 min min.48h 9 0 45. M12 ø 10

surfaces:

A safe surface should be made to absorb the fall:

- Sand grain size 0,25 to 2, minimum thickness 400 mm
- Gravel grain size 2 to 8, minimum thickness 400 mm
- Corck grain size 20 to 80, minimum thickness 400 mm
- Shavings grain size 5 to 30, minimum thickness 400 mm

Synthetic surfaces made in accordance with the PN-EN1177 standard.

www.huse.com.pl

Produced based on the standards BS EN16630: 2015