tel. +48 600 269 537 NIP: 937 217 63 61 www.huse.com.pl biuro@huse.com.pl s.hulboj@huse.com.pl



name:


STREET WORKOUT GATE

SKU:

SW013

description:

Device that allows you to perform stretching and strength exercises, pull-ups, push-ups, sit-ups.

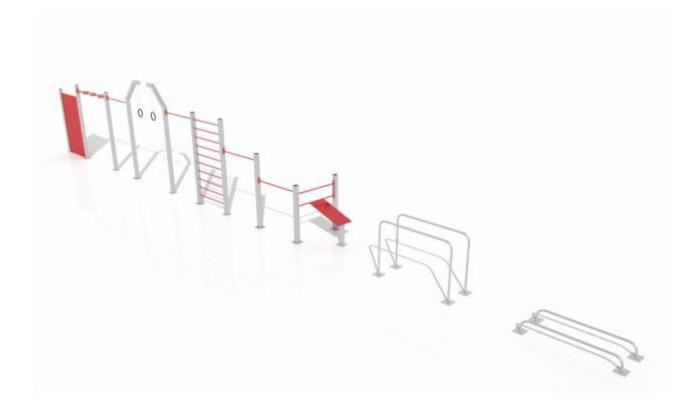

safety rules:

- · Certified device
- · WSU
- · Maximum load 160 kg
- · Minimal increase 140 cm

dimentions (length x width)

120 x 1905 x 360 cm

safety zone:

567 x 2352 cm

technical specifications:

- Galvanized steel pipes min. 3 mm of thickness
- · Pipe diameters: 33 and 48 mm
- Powder coated twice
- Ladders and tubes are attached to the poles with M12 bolts, self-made bolt nuts
- Mounting orifice 200 x 200 x 8 mm, bolt M12
- Profiles 100x100 mm or 80x80 mm


tel. +48 600 269 537 NIP: 937 217 63 61 www.huse.com.pl biuro@huse.com.pl s.hulboj@huse.com.pl



view from the top:

19050 23520

cross-section:




items:

•	bar ø 33,7 mm	4
•	low handrail ø 48,3 mm	2
•	high handrail ø 48,3 mm	2
•	bench with a ladder	1
•	Gymnastic rings	1
•	snake	1
•	vertical ladder	1
	handstand wall	1

tel. +48 600 269 537 NIP: 937 217 63 61 www.huse.com.pl biuro@huse.com.pl s.hulboj@huse.com.pl



foundation:

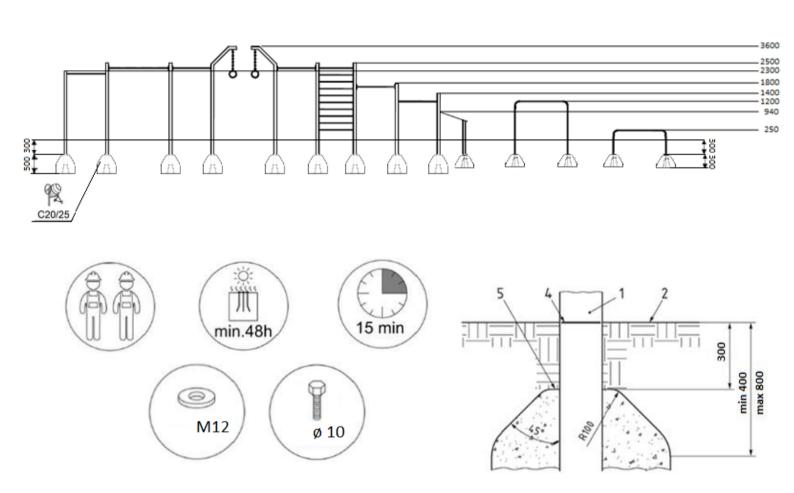

surfaces:

A safe surface should be made to absorb the fall:

- Sand grain size 0,25 to 2, minimum thickness 400 mm
- Gravel grain size 2 to 8, minimum thickness 400 mm
- Corck grain size 20 to 80, minimum thickness 400 mm
- **Shavings** grain size 5 to 30, minimum thickness 400 mm

Synthetic surfaces made in accordance with the PN-EN1177 standard.